




**CUSTOMER SUPPLIED WALL MOUNTED UNDERGROUND METER ASSEMBLY, RESIDENTIAL, 200 AMP RATED**  
**For Upgraded or Repaired Existing Services Only**  
**N.A. for New Electric Services**

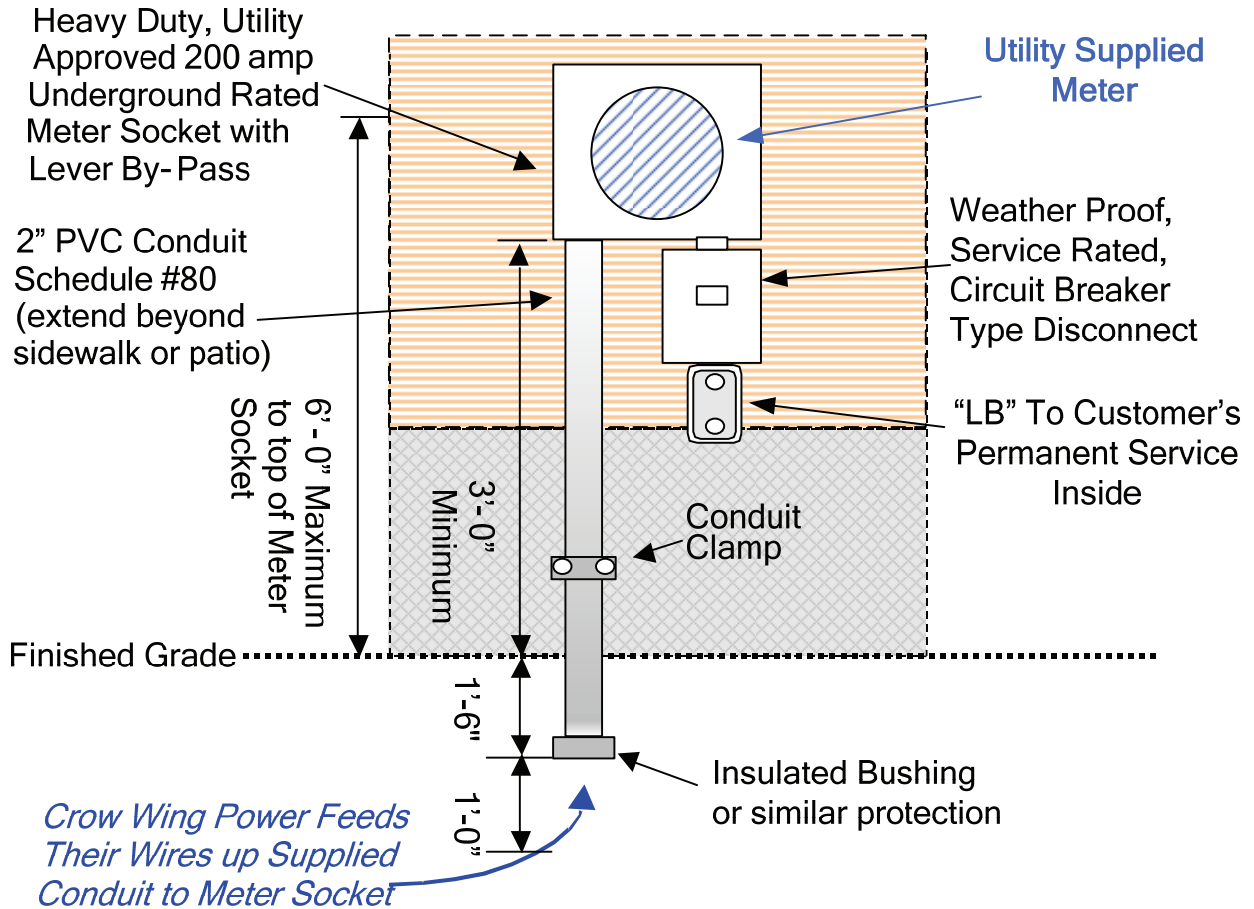

**GROUNDING TO THE ELECTRIC SERVICE PANEL**

For *new* construction, grounding is to a concrete encased electrode. This is:

- At least 20' of #4 AWG bare copper conductor in the concrete footing
- #4 AWG bare copper conductor suitably bonded to the reinforcing steel in the concrete
- #4 AWG bare copper conductor bonded to 20' of reinforcing rod stubbed through foundation

For *existing* structures, an external 8' ground rod may be allowed

**Notes:**

All meter assemblies must be approved by the Minnesota State Board of Electricity prior to energizing by Crow Wing Power. Web-site: <http://www.dli.mn.gov>.

Hardware to be rust resistant.

# TYPICAL APPLICATIONS

## Underground Service to Meter On Wall

