




CUSTOMER SUPPLIED WALL MOUNTED UNDERGROUND METER ASSEMBLY, RESIDENTIAL, 200 AMP RATED

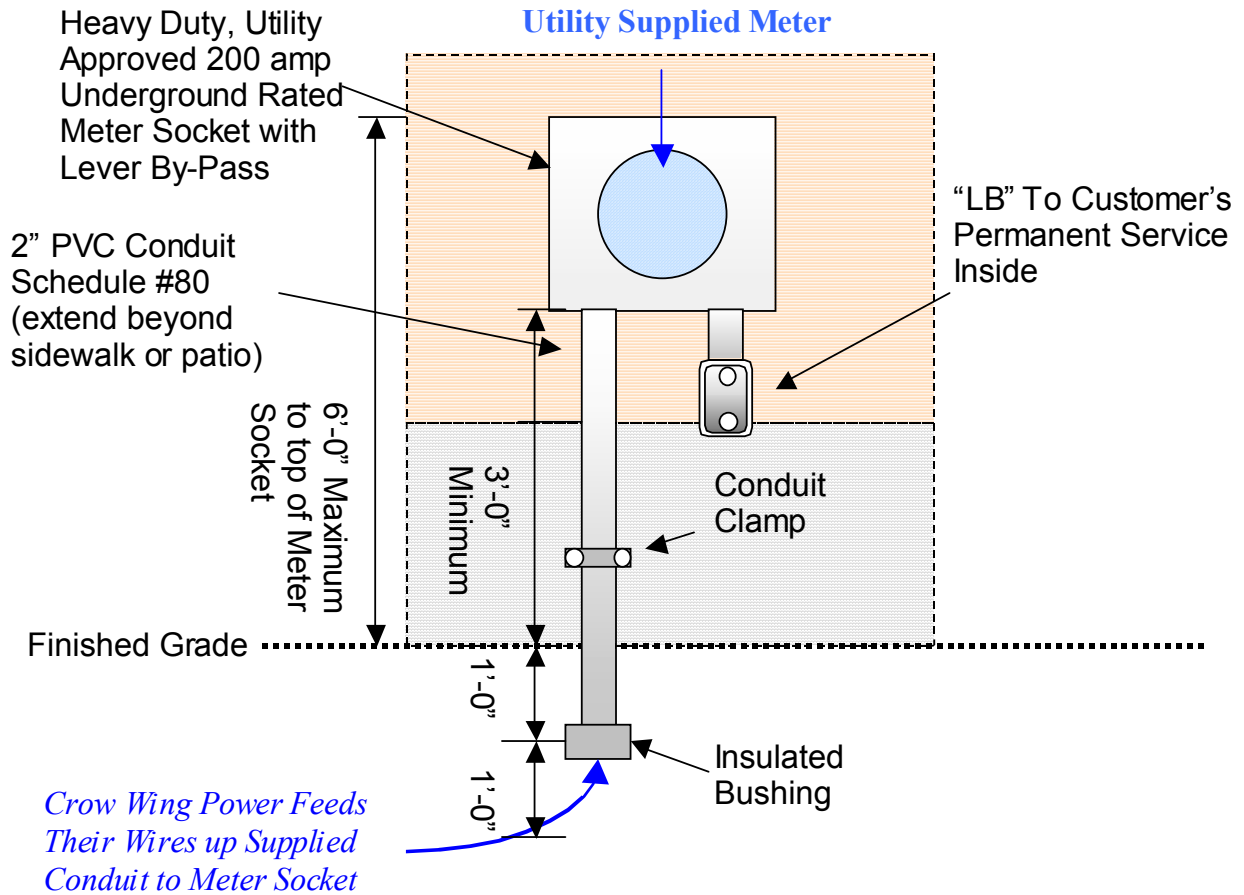

GROUNDING TO THE ELECTRIC SERVICE PANEL

For new construction, grounding is by a concrete encased electrode. This is:

- At least 20' of #4 AWG bare copper conductor in the concrete footing
- #4 AWG bare copper conductor suitably bonded to the reinforcing steel in the concrete
- #4 AWG bare copper conductor bonded to 20' of reinforcing rod stubbed through foundation

For existing structures, an external 8' ground rod may be allowed.

Notes:

All meter assemblies must be approved by the Minnesota State Board of Electricity prior to energizing by Crow Wing Power.

Hardware to be rust resistant.