




**CUSTOMER SUPPLIED
PEDESTAL MOUNTED
UNDERGROUND DOUBLE METER
ASSEMBLY, RESIDENTIAL, 2 X 200
AMP RATED**

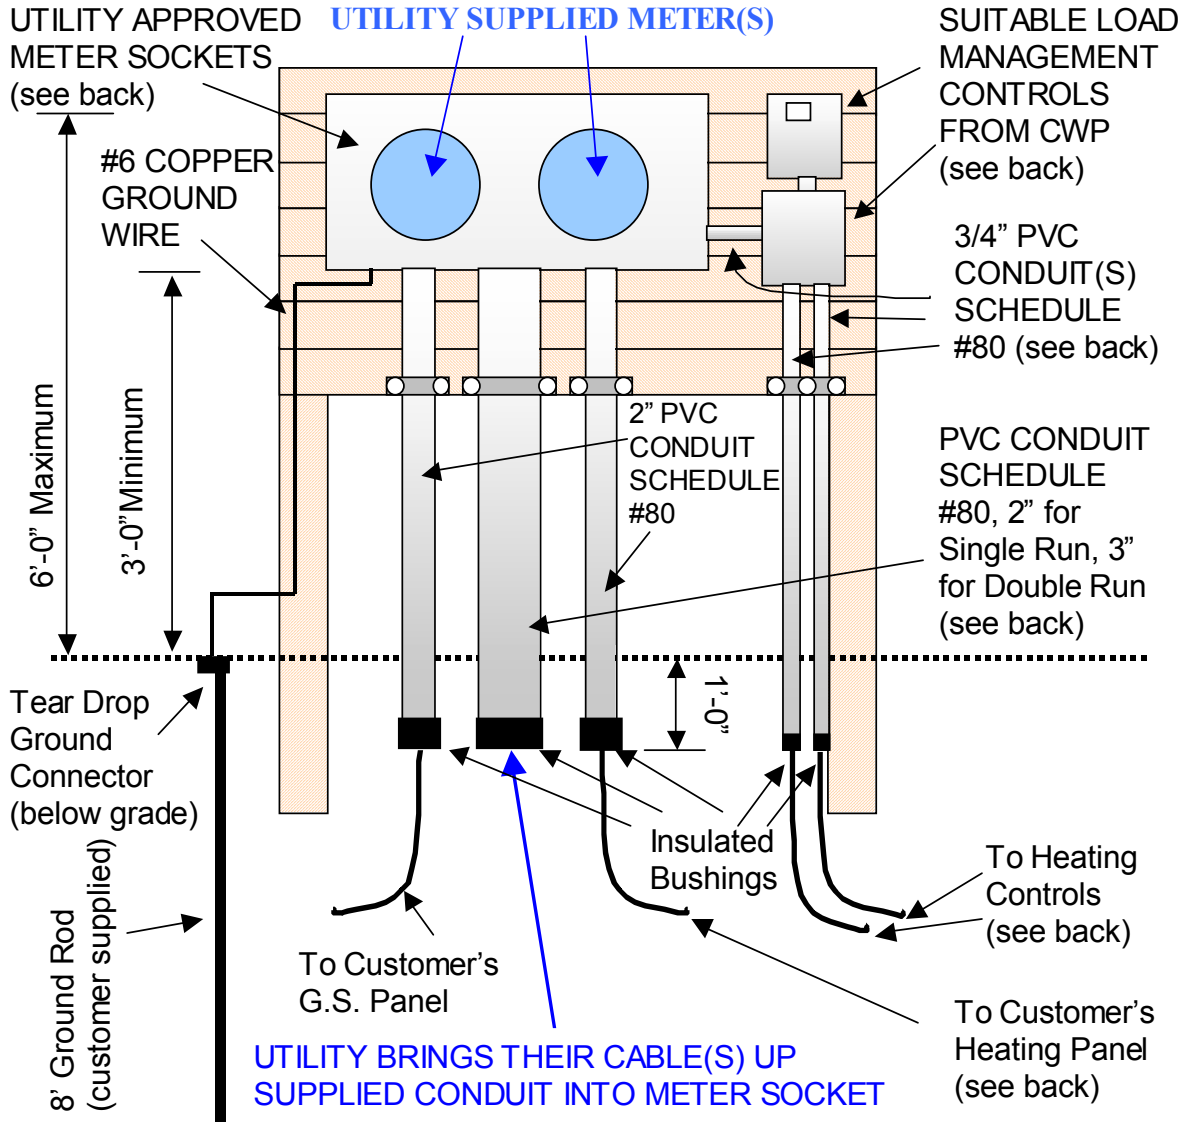

Notes: **All Meter Assemblies Must Be Approved by Minnesota State Board of Electricity Prior to Energizing by Crow Wing Power.**
 Lumber to be either full treated, or rot resistant wood such as redwood or cedar.
 Uprights should be minimum 4"x4" size placed 2' - 3' in ground to avoid frost shifting.
 Backing material should be minimum 3/4" thickness. Width must be sufficient to adequately mount all equipment. A typical double meter socket is 25 1/4" h x 37 1/4" w.
 All Hardware must be rust resistant.